


Plunge Pool Recirculation – Layout plan




- Can be bunched up closer under a deck and valves located in convenient positions
- Keep in mind filter need to be removed from the top
- Power requirements is standard 10 amp power point with timer and two outlets
- All pipe work 40mm pressure rated pipe work
- Refer to individual items operating manuals received.

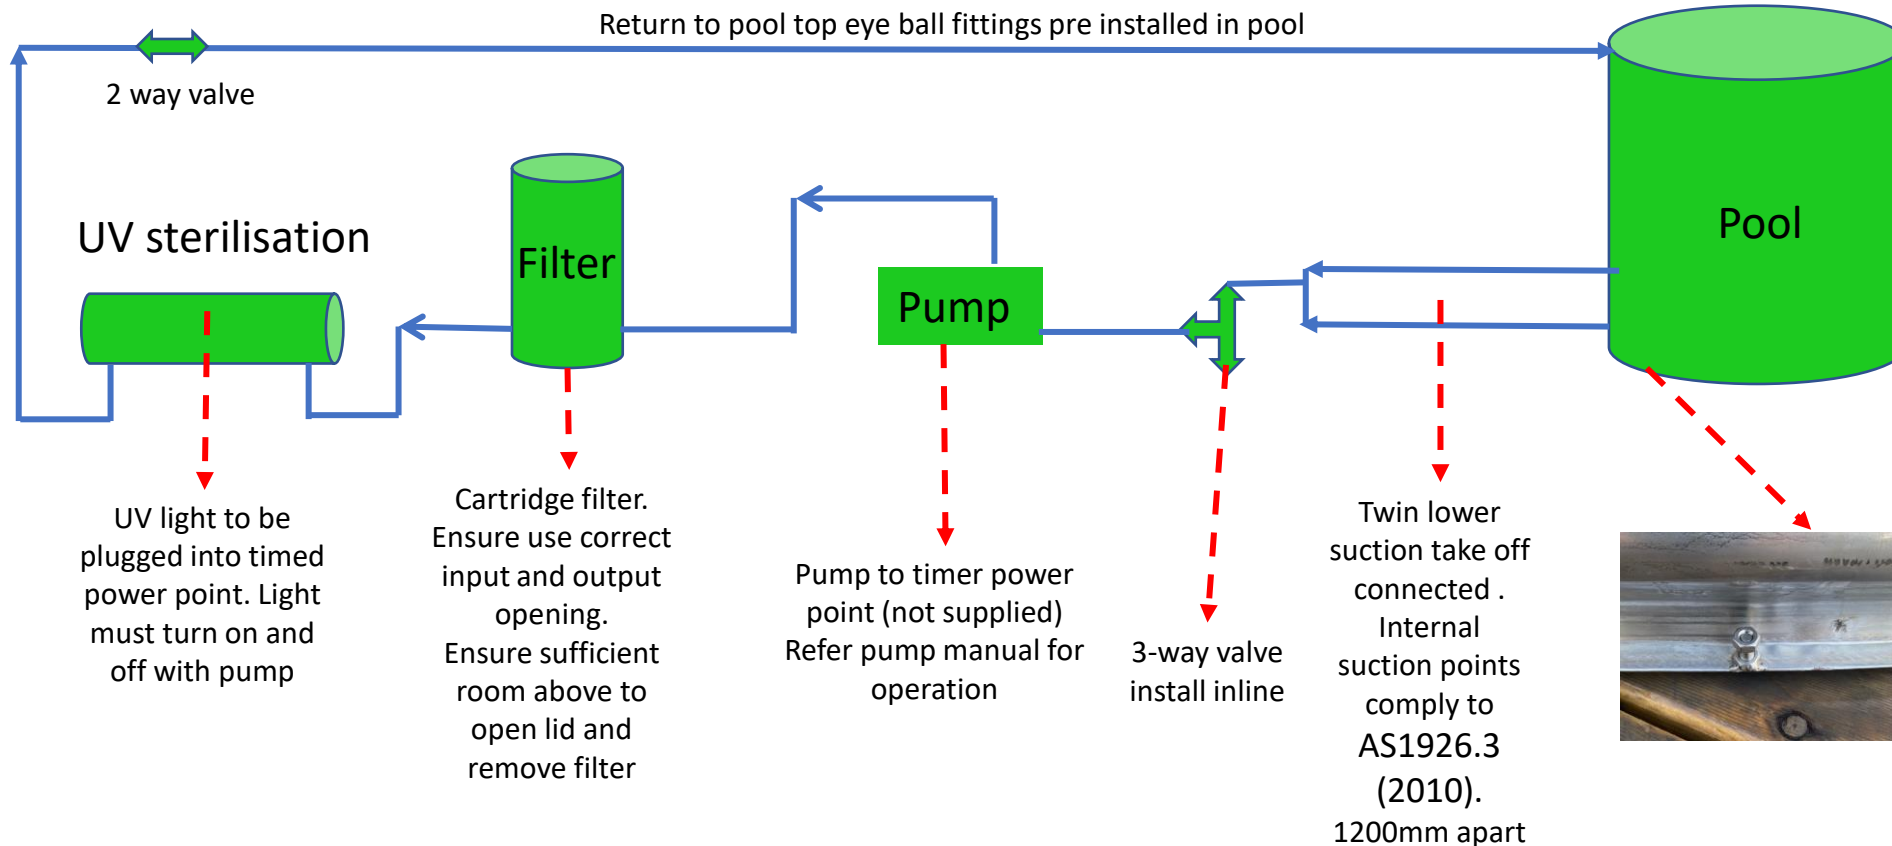

Note
Pool must be earthed using the earth tab located at base of pool near suction fittings

Plunge Pool Recirculation – example pictures

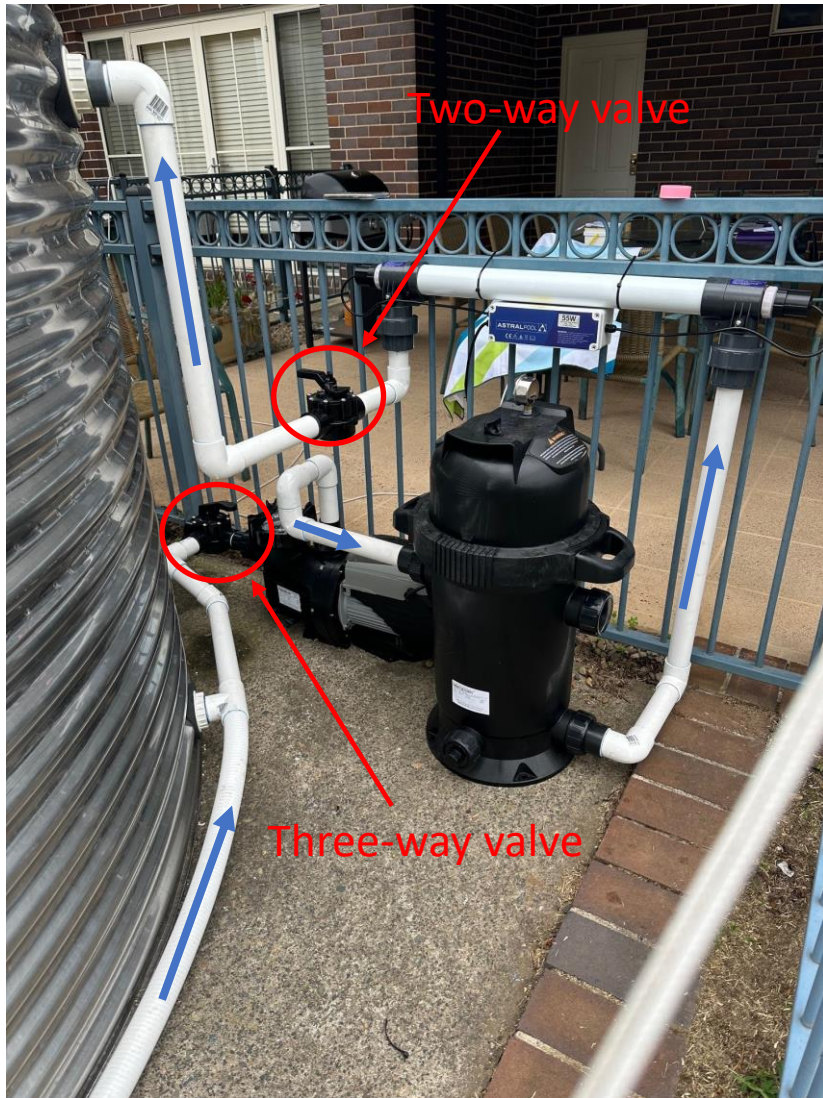


Direction of water flow




Owner Supplied items

- 40mm pressure pipe
- 40mm elbows as required
- 40mm x 45degree elbows as required
- 40mm x 50mm in socket reducer x 2

Operation of 3 way valve

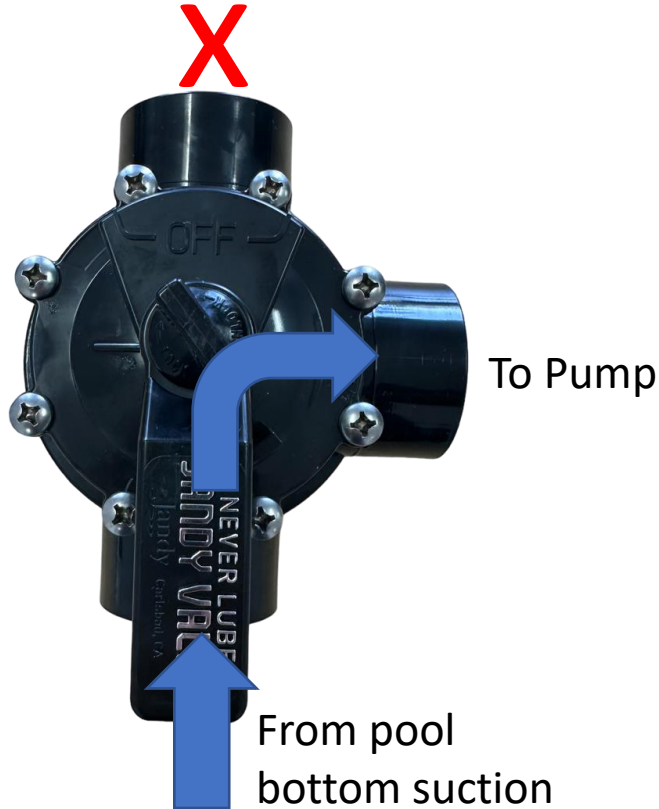

Normal mode
water flowing to
pump from pool

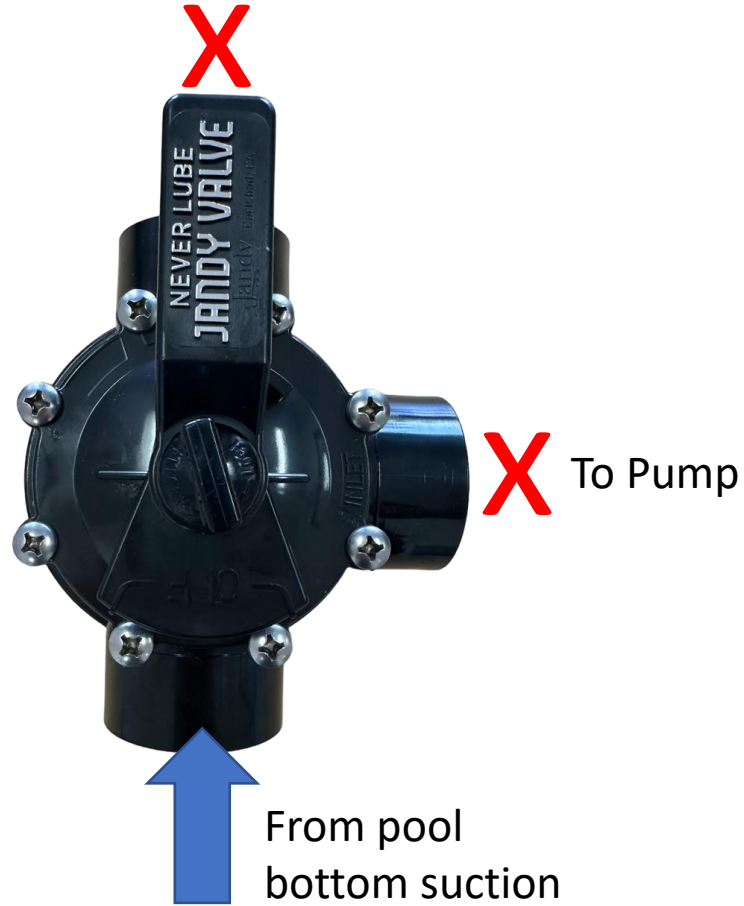

Closed to block water
from pool to allow filter
removal and clean



All open mode to drain
excess water from the
pool